




1. The state of th

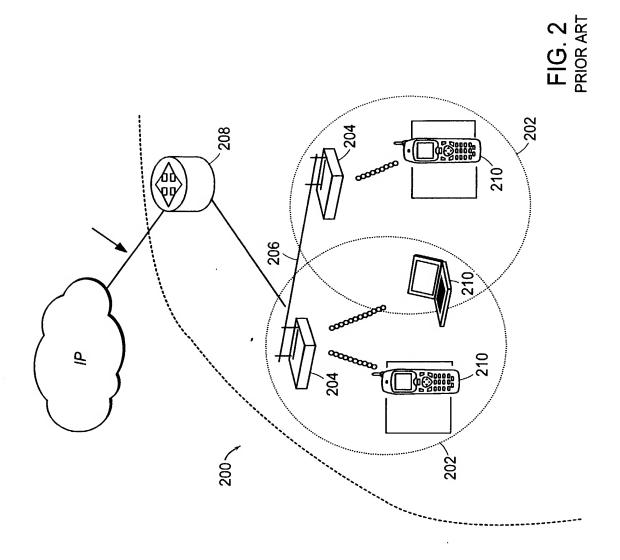



10

and the language

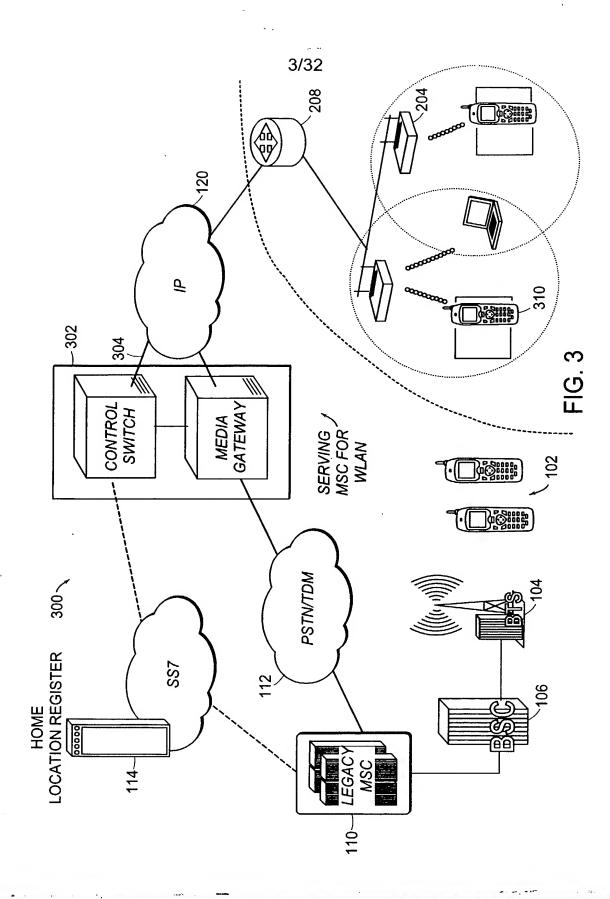

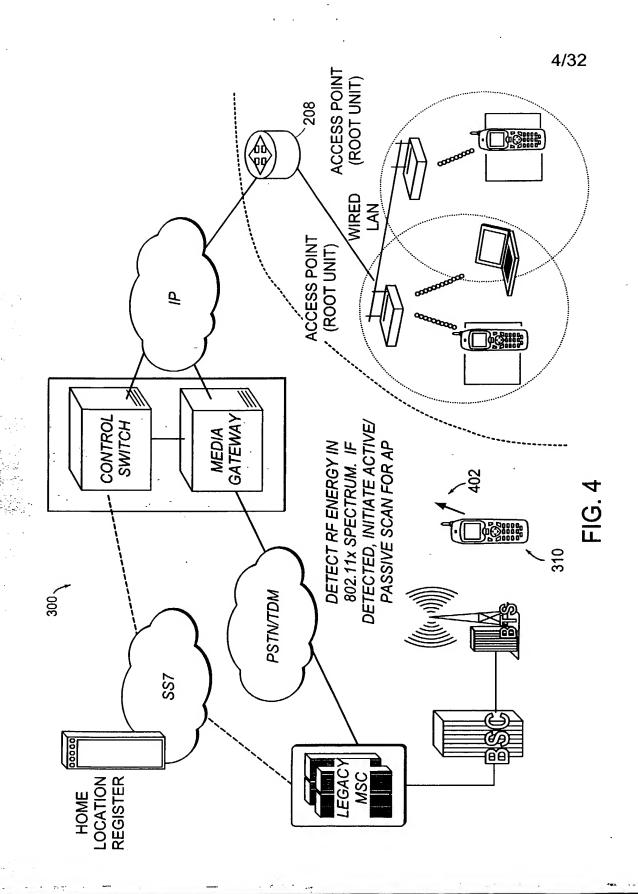

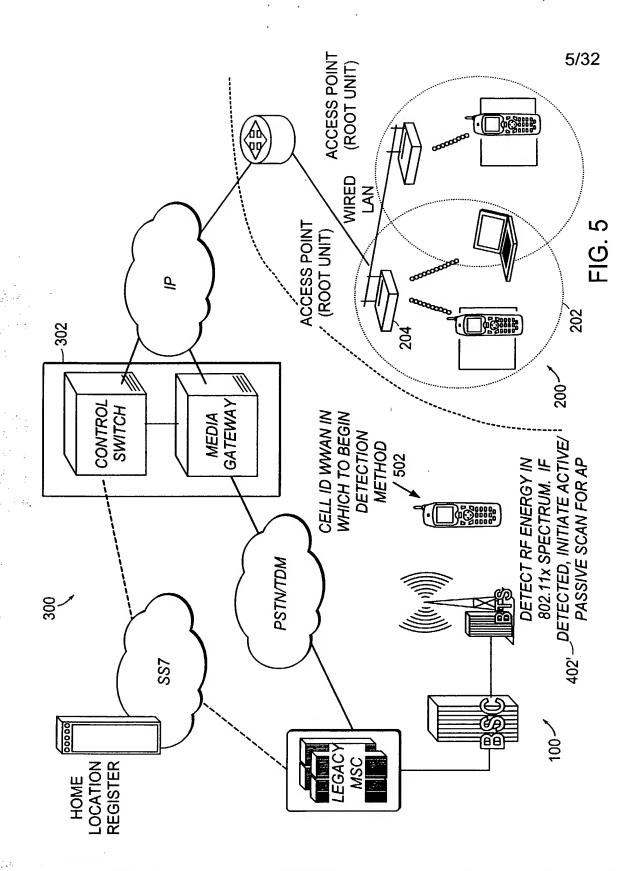

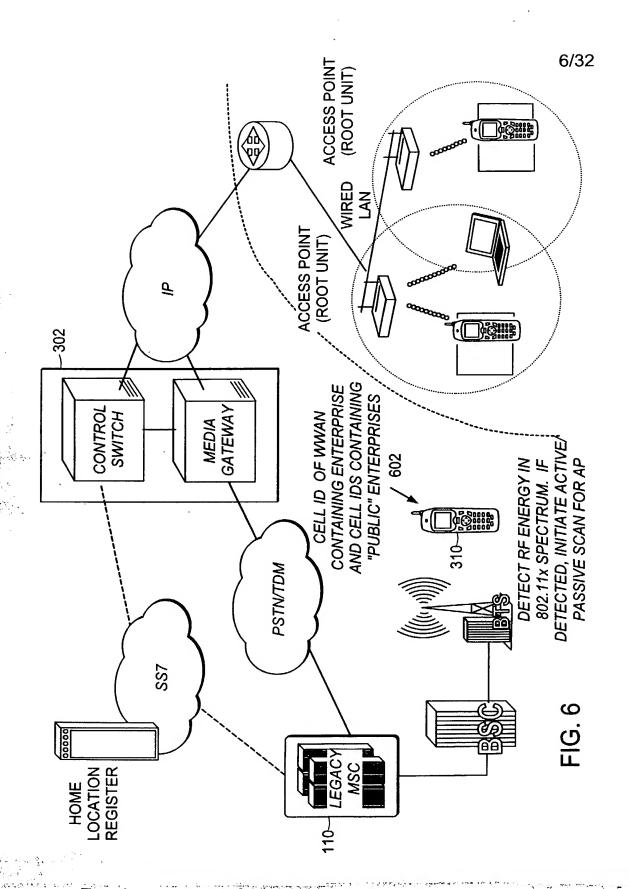

7/32

GSM/UMTS
MULTI-MODE PHONE

GSM/UMTS + WLAN MODEM

VoIP (SIP/RTP/UDP/IP)

MOBILITY VIA PREFERRED EMBODIMENT CLIENT

MOBILITY VIA PREFERRED EMBODIMENT CLIENT

VoIP (SIP/RTP/UDP/IP)

FIG.

the state of the s


310

MULTI-MODE PHONE

CDMA

IS95/CDMA2000

WLAN MODEM

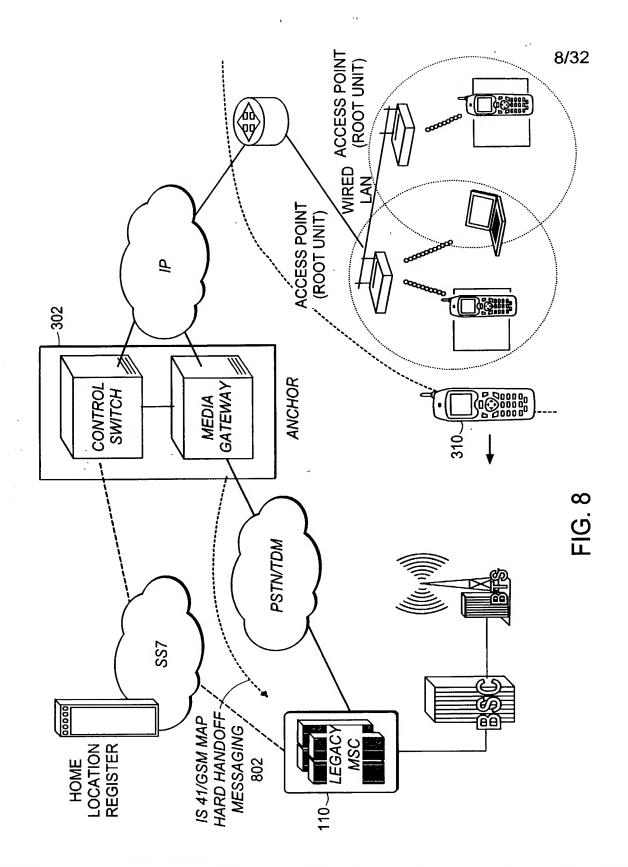

The second secon

9/32


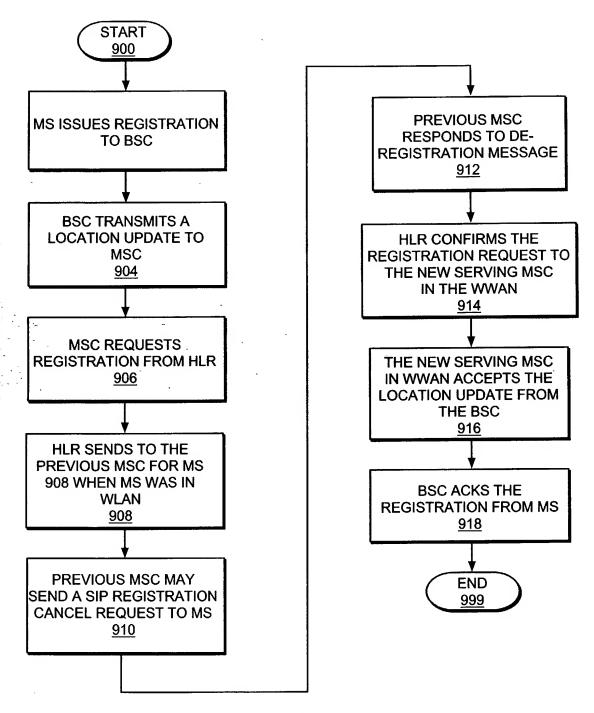


FIG. 9

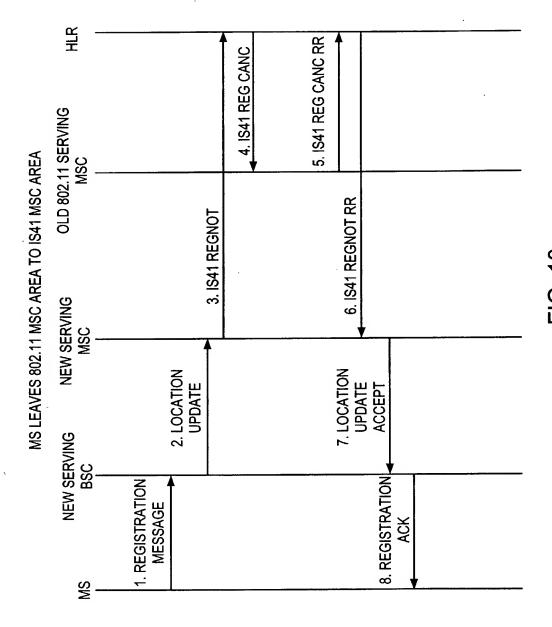

<u>16</u>. 10

11/32



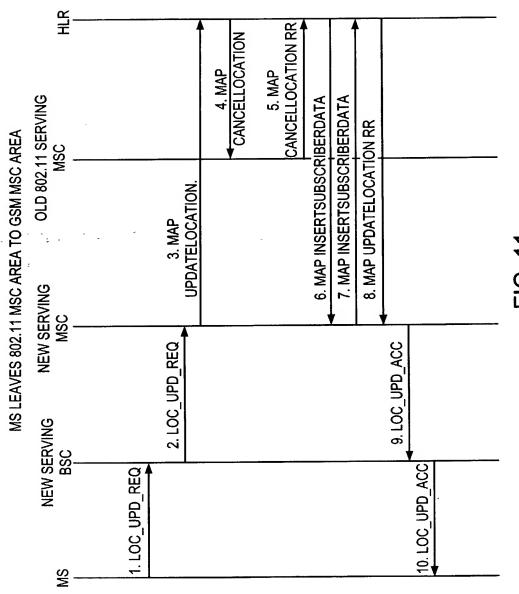


FIG. 11

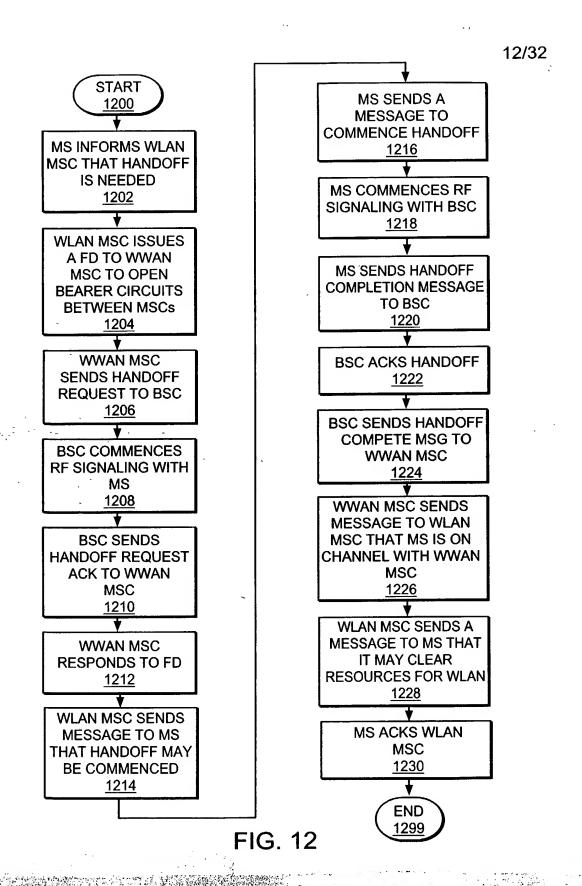

.

1 3 5 5 5

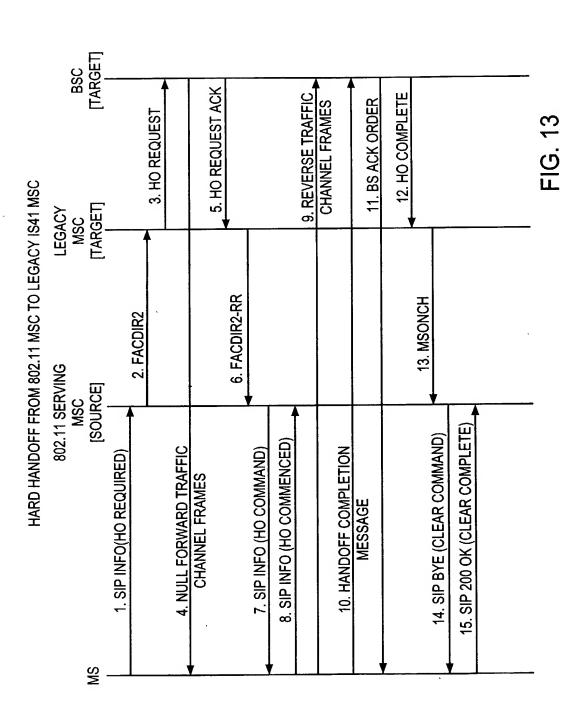

in the second

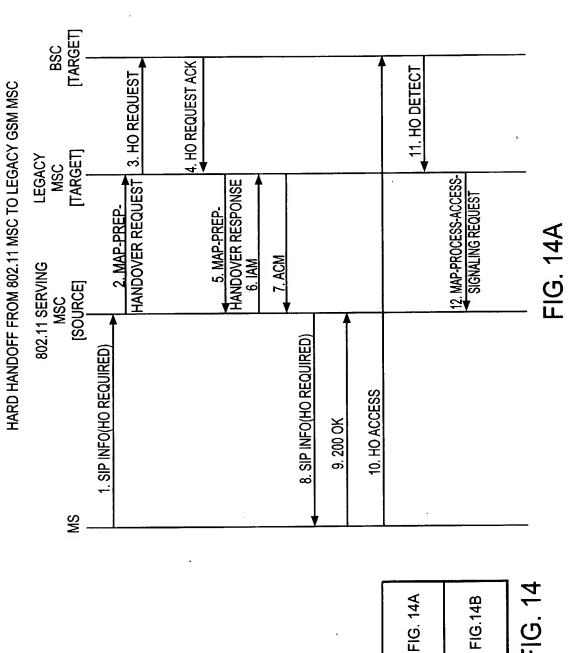


FIG. 14

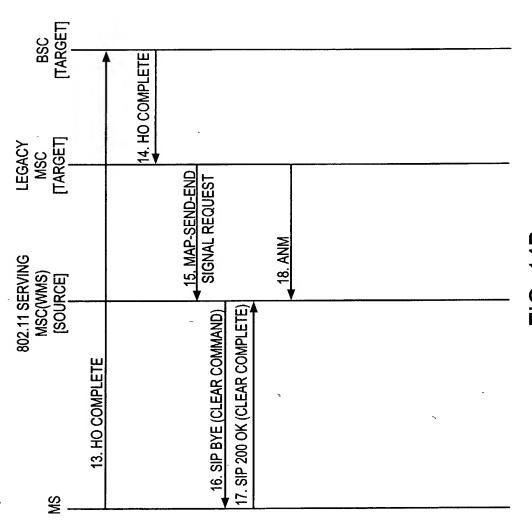
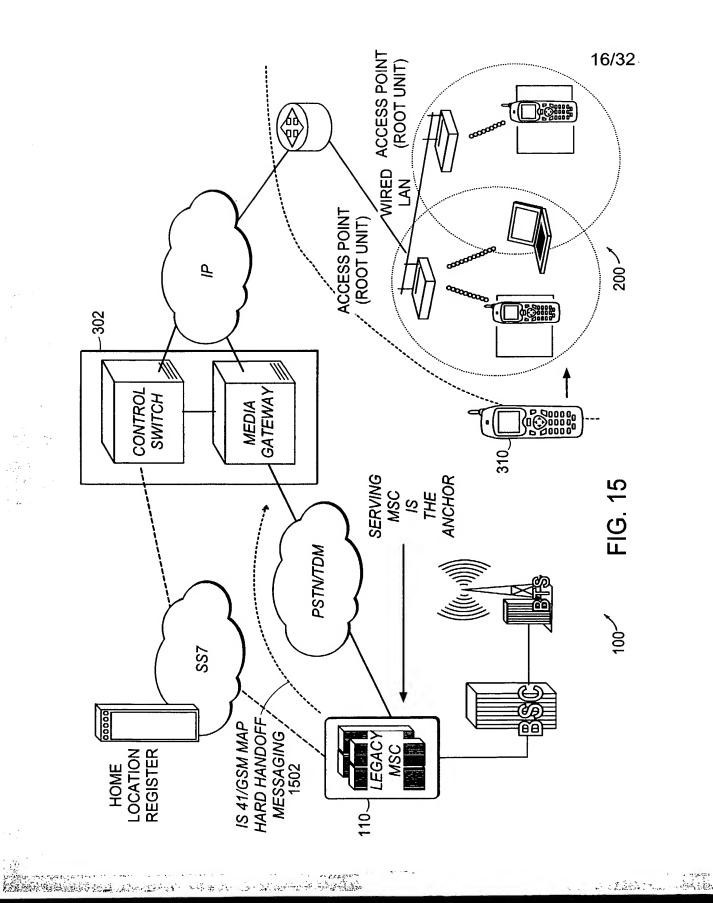


FIG. 14B

STATEMENT - TO HITAKEN



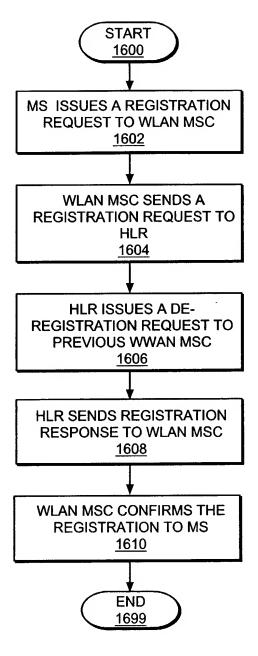
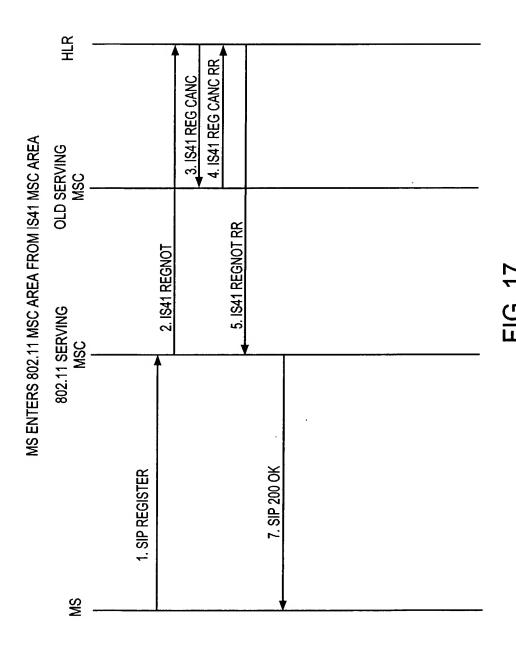
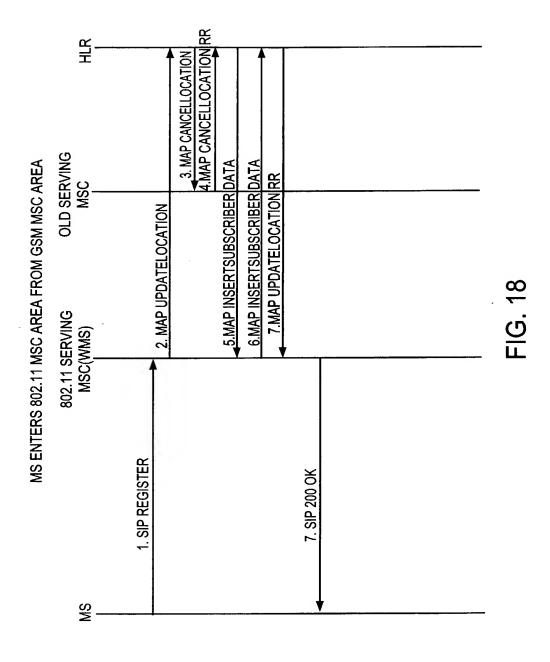


FIG. 16

and the second s







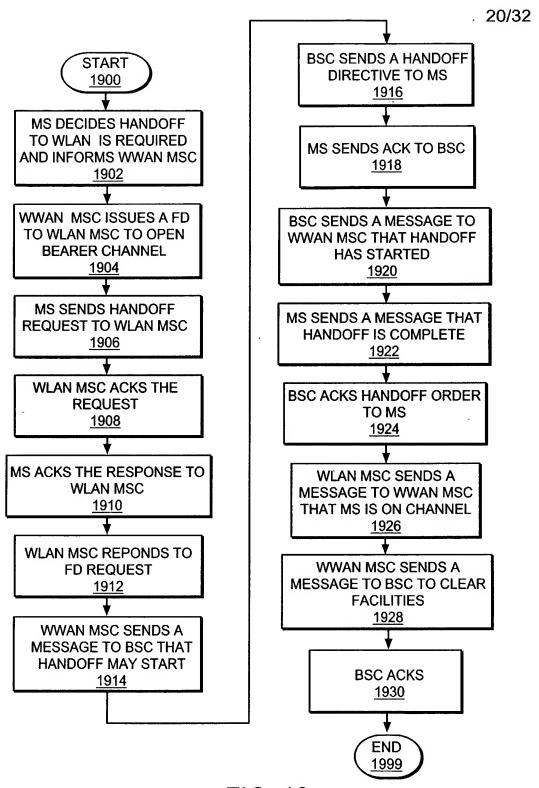


FIG. 19


The second secon

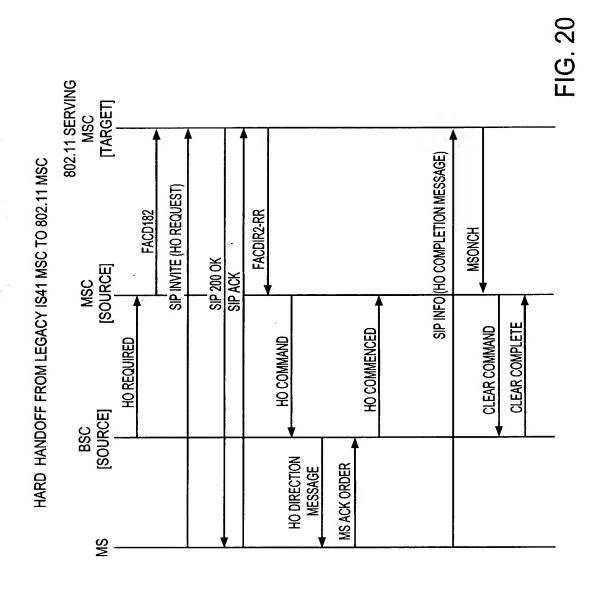

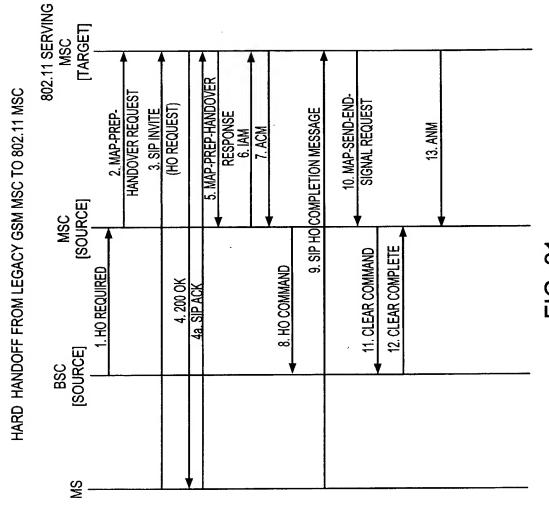


·IG. 21


1 3

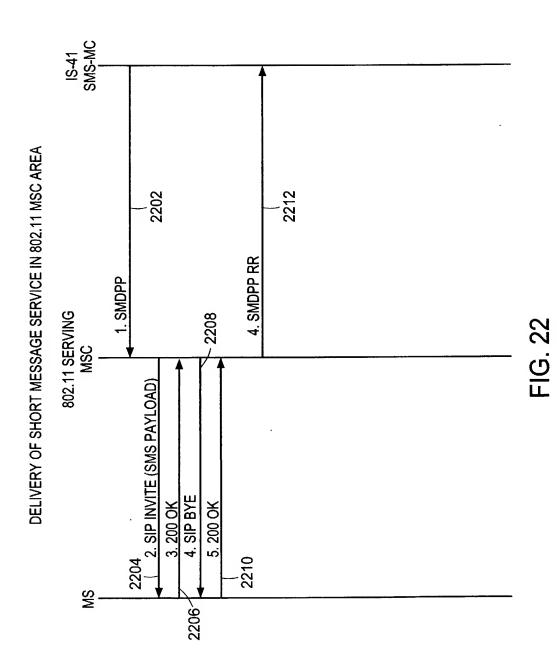




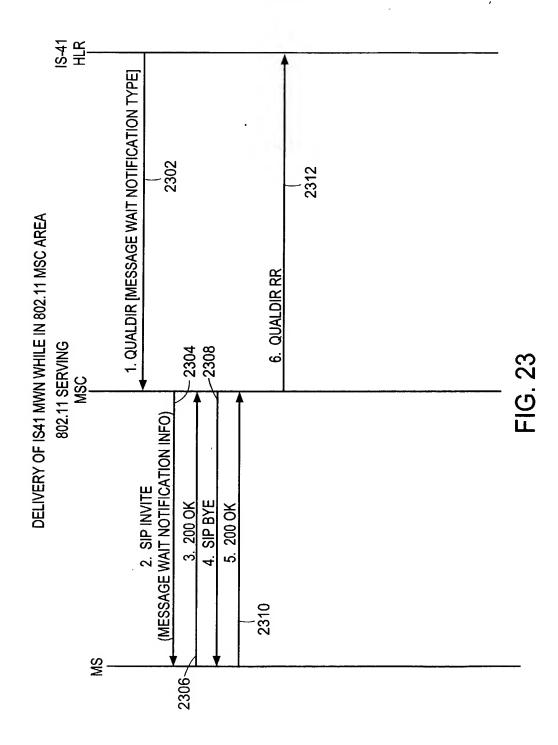



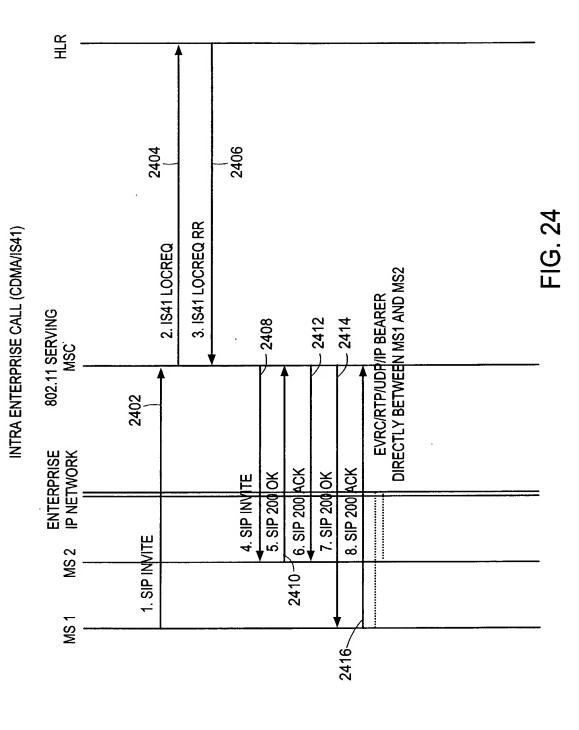



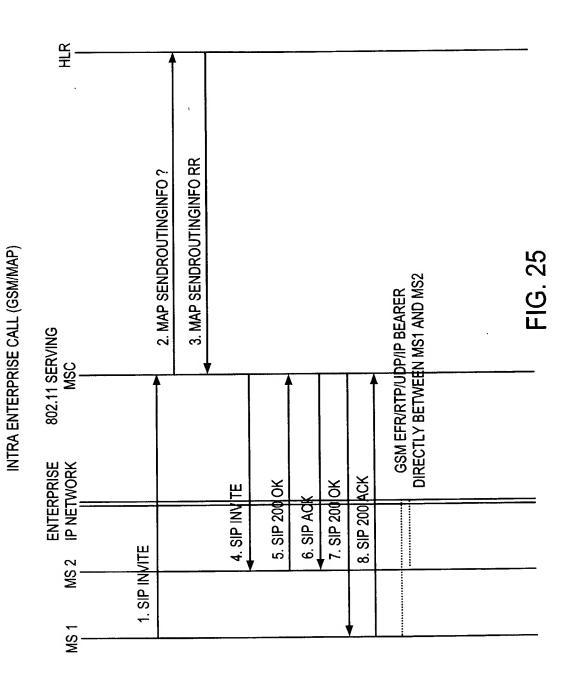


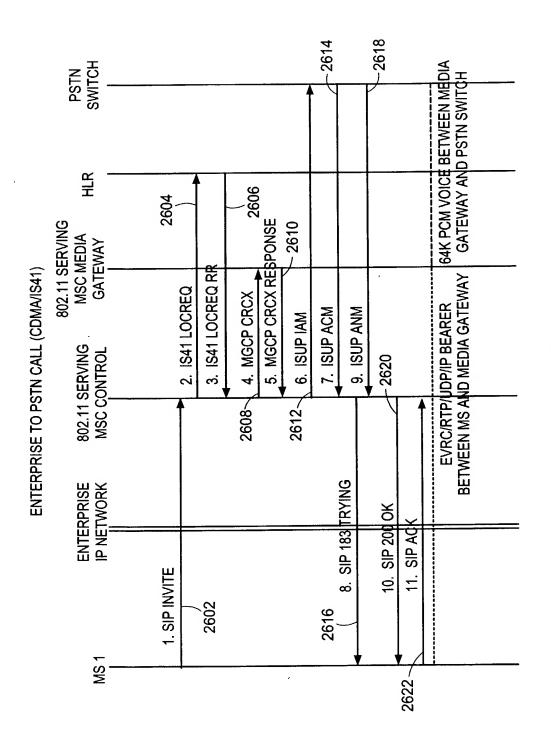



FIG. 26




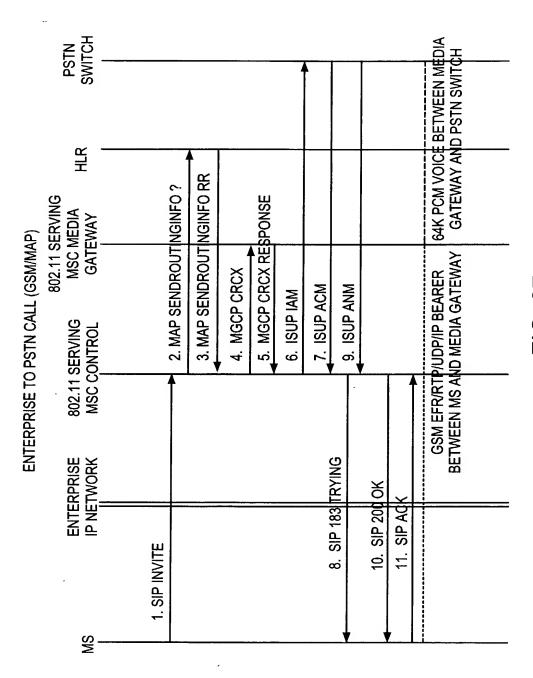



-

FIG. 27

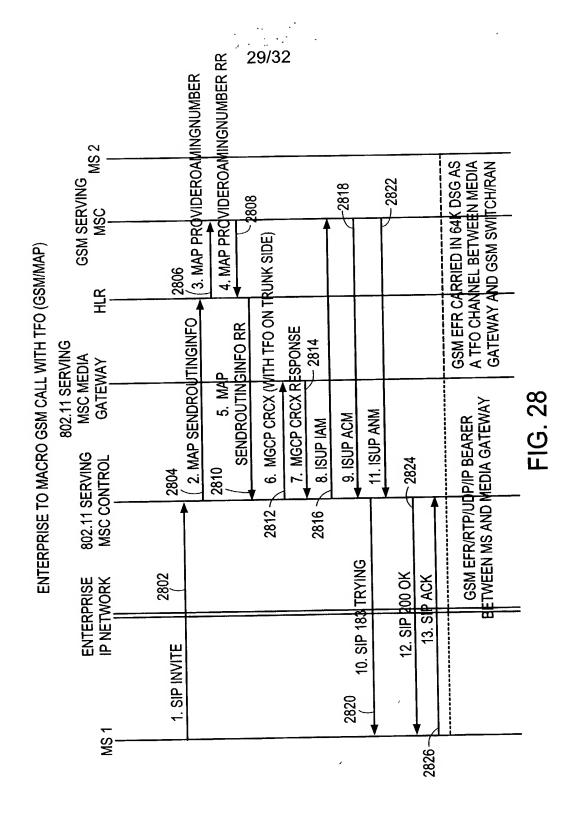

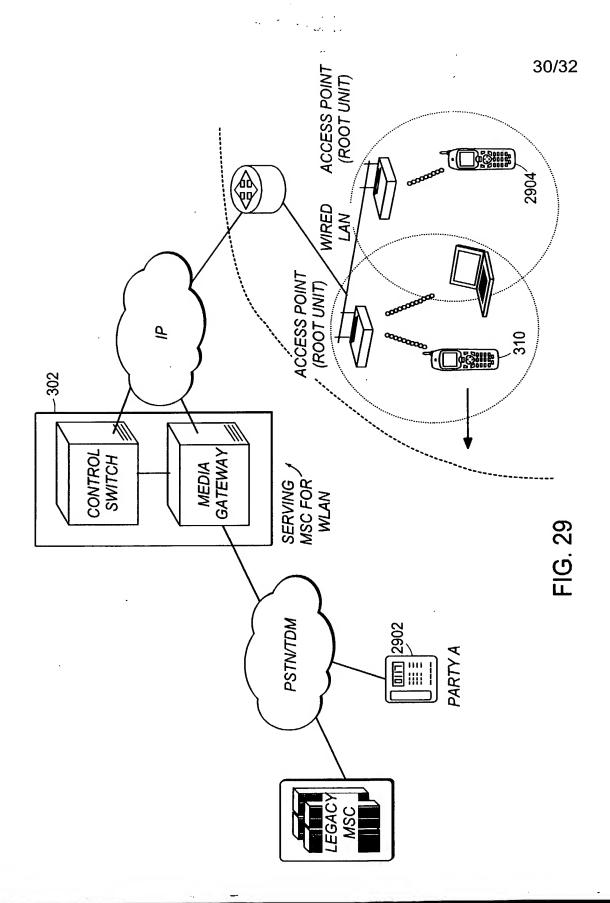

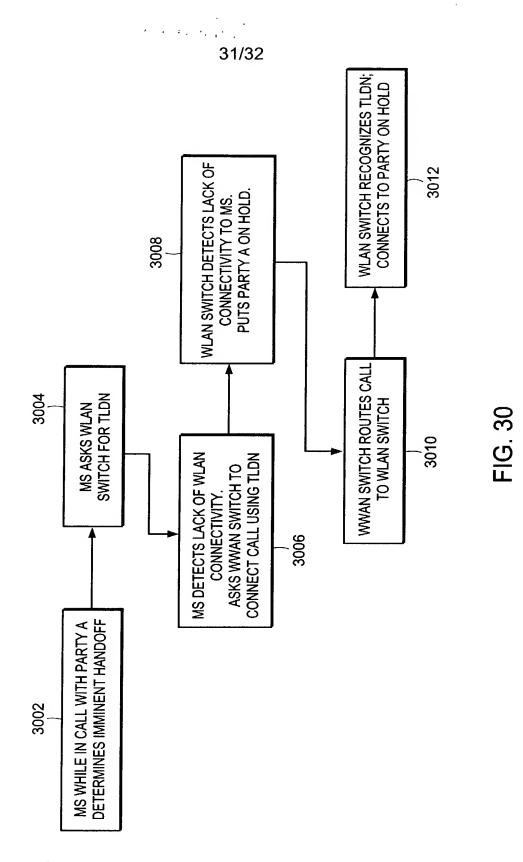

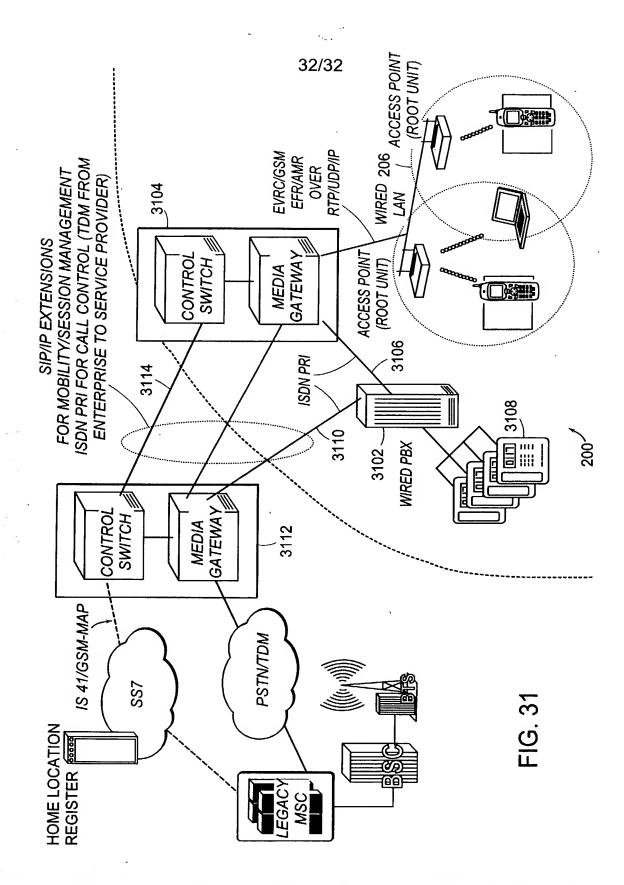

A Ag